

EchoSmart™

Interface Level Analyzers



www.EntechDesign.com



Smart


EchoSmart Sensors generate and process the ultrasonic signal for continuous, real-time measurement and maximum flexibility.

EchoSmart Sensors employ interface-detection algorithms developed exclusively by Entech with proven performance across the US and around the world.

Friendly

Easy to set-up, easy to operate, and easy to secure consistent, reliable, trouble-free measurements - that's user-friendly, that's EchoSmart!

- Large display with intuitive screens for quick entry of parameters
- Soft Key operation with Help Prompts for all settings
- Automatic initialization for easy start-up
- Adaptive algorithms in each sensor for uninterrupted operation
- Track well-settled blankets
- Can also be configured to track dispersed solids (fluff or rag layer)
- Monitor blanket levels 24/7/365
- Suitable for round or rectangular clarifiers

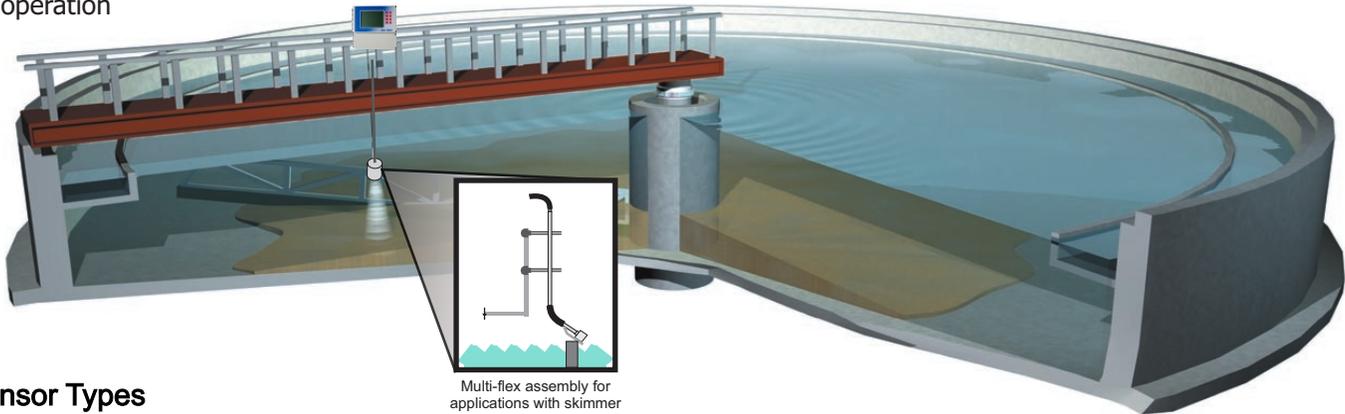

Multi-flex assembly for applications with skimmer

Sensor Types



Standard Sensor

Typical for applications with surface skimmers. Multi-flex assembly recommended.



Wiper Sensor

Self-cleaning face for applications without surface skimmers.




Level & Turbidity

Self-cleaning face with sludge level and turbidity in one sensor.

Sensors come standard with 20 feet of cable with custom lengths of up to 400 feet possible


Available Outputs

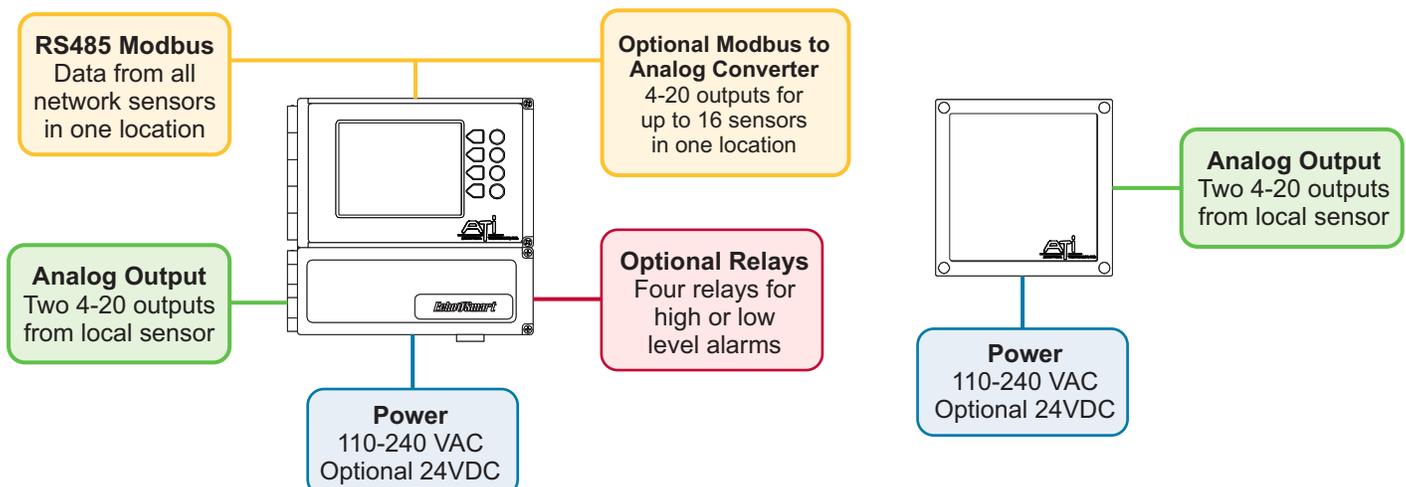

Flexible

Adaptable configuration options for a variety of installation requirements and straightforward plant retrofit solutions

- Available as stand-alone system
- Networks of up to sixteen sensors possible with only one Controller needed
- Easily add more sensors to an existing network
- Communication between devices can be achieved through:
 - + Hard-wired connections
 - + Powerful sub-1GHz RF with self-healing mesh technology*

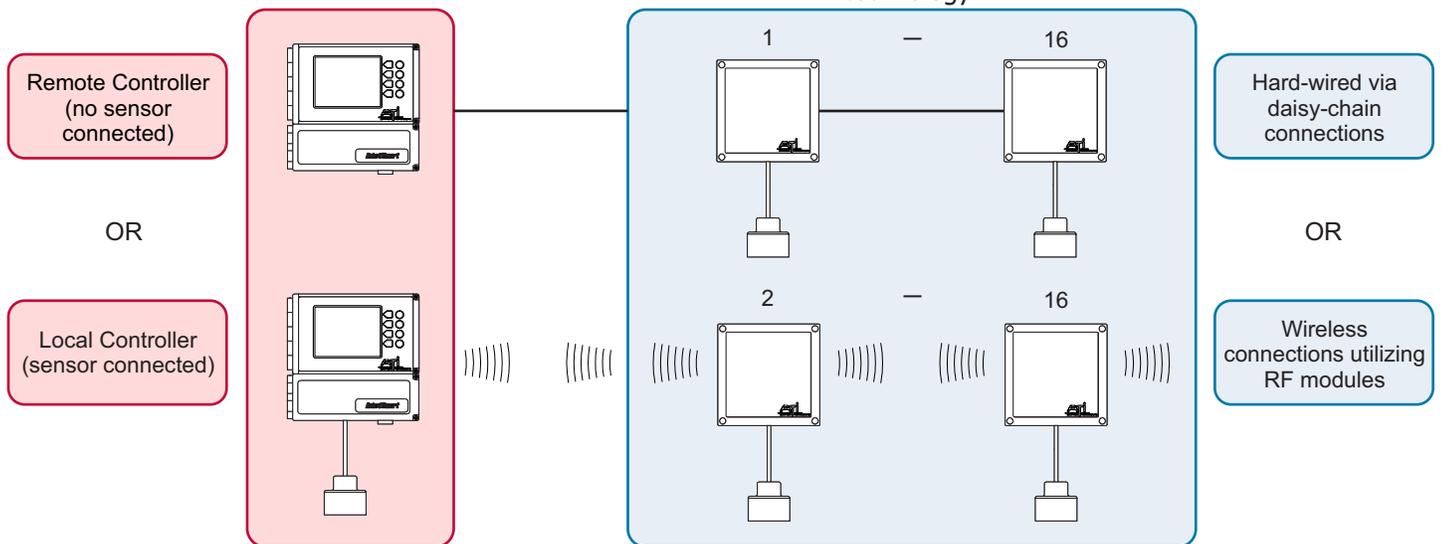

* Radio available as internally mounted plug-and-play module with external antenna or in a separate enclosure for maximum range and flexibility. Self-healing mesh technology eliminates most line of sight interference.



Free Demo

Ask about a 30-day free trial consisting of a stand-alone system with a cell modem for insights into the benefits of continuous monitoring.



Worldwide Installation

ATI-Entech enjoys a HUGE install base across the country and around the world. References available.



Remote Service via Cell Modem*

Our Factory Remote Service puts every EchoSmart system in the reach of our expert engineers and service technicians for optional instrument commissioning and follow-on service at a fraction of the cost of field services.

* Connection is independent of local LAN and requires no customer activation



EchoSmart™ Specifications

EchoSmart Sensor

Measuring Principle
Underwater acoustic

Range
1.0 to 32 ft. (0.305 to 10.0 m)

Sensor Measurement Resolution
0.1 Unit of measure

Accuracy
0.2 in at 10.0 ft. (5 mm at 3.05 m)

Operating Temperature
34 to 125°F (1 to 52°C)

Power Requirement
15VDC Standard: 2.4W; Wiper: 3W

Configuration Backup
Settings stored in FLASH memory


Sensor Construction
IP68, ABS and epoxy
Stainless steel and rubber (wiper only)

Turbidity (Optional)
Measurement Principle
90 degrees scattered light, pulsed LED

Range
0-50 NTU

Weight
Standard Sensor: 2.25 lb (1.02 kg)
Wiper Sensor: 2.75 lb (1.25 kg)
Wiper Sensor w/ Turbidity: 2.75 lb (1.25 kg)

Certifications
CE

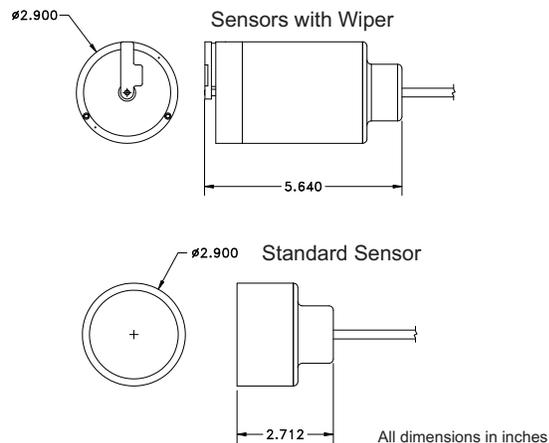

Controller

Operational Conditions
-40° to +140°F (-40° to +60° C)

Power Requirements
100 to 240 VAC, 50/60 Hz - 1.4A
Power 65 W (fused)
Optional: 24VDC

Display
Graphical backlit monochrome screen
Resolution: 320 x 240 pixels
Viewing Area: 2.6 x 3.45 in (92 x 122 mm)

Reported Measurement Resolution
1.0 (in & cm), 0.1 (ft), 0.01 (m)

Communications
RS-485 MODBUS RTU
(2) 4-20mA Output
(1) Level Measurement
(1) Turbidity (Optional)

Optional 900MHz RF Module
Self-healing mesh network
Approvals: FCC Part 15C, Industry Canada

Relays (Optional)
(4) Relays: 10A @ 250 VAC; 10A @ 30VDC
Configurable for high/low measurement alert or sensor fault


Configuration Backup
Battery backup retains settings in event of power loss

Enclosure
NEMA 4X, IP65; Polycarbonate

Weight
Approximately 3.0 lb (1.36 kg) depending on configuration

Certifications
CE

Modbus to Analog Output Converter (optional)
18-30VDC
DIN Rail Mount
Up to 16 isolated analog outputs

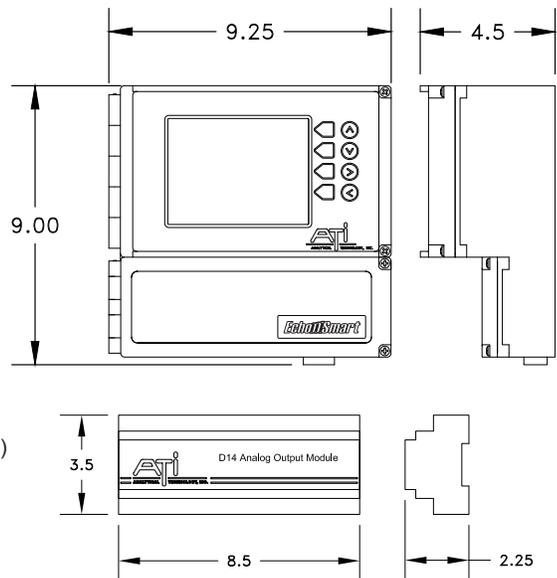

Power Supply Unit (Required only in multi-sensor network applications)

Operational Conditions
-40° to +140°F (-40° to +60° C)

Power Requirements
100 to 240 VAC, 50/60 Hz - 0.5A
Power 20 W (fused)
Optional: 24VDC


Communications
RS-485 MODBUS RTU
(2) 4-20mA Output
(1) Level Measurement
(1) Turbidity (Optional)

Optional 900MHz RF Module
Self-healing mesh network
Approvals: FCC Part 15C, Industry Canada

Enclosure
NEMA 4X, IP65; Polycarbonate

Weight
Approximately 1.5 lb (0.68 kg)

Certifications
CE

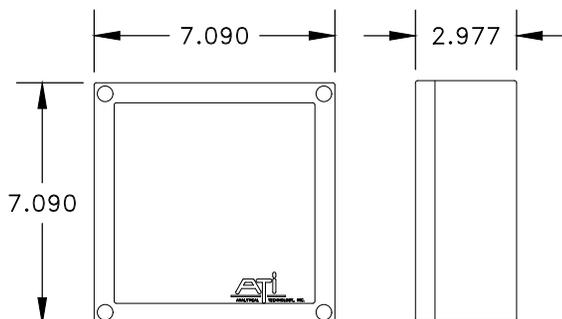

6 Iron Bridge Drive
Collegeville, PA 19426
(610) 917-0991
sales@analyticaltechnology.com



315 S. Locust Street, Suite 104
Denton, TX 76201
(940) 898-1173
entech@entechdesign.com